

Application data

Beam style	variable-spread, well-defined soft beam
Suitable for	theatre, clubs, small stage areas
Specification level	economy range
Beam angle	7° - 58°
Typical throw distance	6 - 30 ft

Electrical data

Supply Volts	120V AC single phase
Max. Lamp Watts	650W
Lamp base	GY9.5
Auto-disconnect	no
Cable/connection	5 ft, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical data

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	55mm diameter glass
Lens	120mm diameter Pebble-Convex
Mounting & suspension	steel yoke with 12mm center hole and DIN mounting. Yoke rotates 360°.
Rear handle	yes
Weight/Packed weight	9 lbs / 10 lbs
Overall dimensions	210mm (w) x 305mm (d) x 193mm (h) max 280mm (h)
Packed volume	0.021m ³
Filter cut size	150 x 150mm
Accessory runners	3 slots
Safety guard	included
Colour frame	metal, 150x150mm, supplied
Lamp access	sliding top cover
Lens access	front and via lamp access

Operational data

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barn door accessory
Positional adjustment	single rim-clamp tilt lock

Lamp types

500W	FRG 3200K 150 hrs
650W	FRK 3200°K 200 hrs

LDR recommends Philips lamps

Accessories

Spare metal color frame	■20100103 □20100103B ■20100103C
Spare safety guard	■20100203 □20100203B ■20100203C
4-leaf barn door	■20100303 □20100303B ■20100303C □■20100303D ■■20100303E
Hook clamp	20100900
Alu-grip clamp	20101100
Safety cable	20101200
Color Scroller Xpress	20106013 with mounting plate 20600003

Photometric data

Spot focus	FRK									
Beam dia.	0.2	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2	m
lux	24800	11022	6200	3968	2756	2024	1550	1225	992	
Distance	2	3	4	5	6	7	8	9	10	m


Flood focus										
Beam dia.	2.2	3.3	4.4	5.5	6.7	7.8	8.9	10	11.1	m
lux	2148	955	537	344	239	175	134	106	86	
Distance	2	3	4	5	6	7	8	9	10	m

tempo[®] pc 650 plus

500W/650W

pebble-convex

part number : ■10602000 □10602001 ■10602002

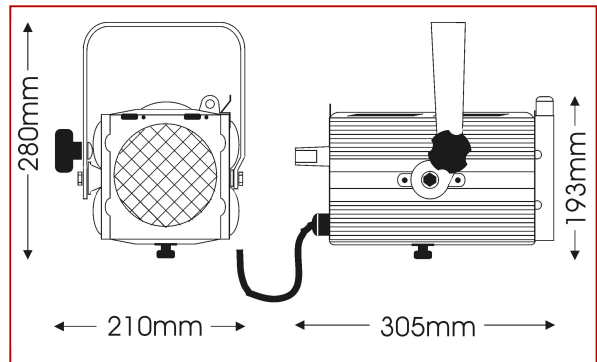

Simple yet high-quality 500W/650W pc spotlight featuring a slide-focus variable-spread beam to offer more definition than the softer Fresnel beam.

Tempo pc650 plus is ideal for close projection in small stage venues and whenever budget is a priority. A color frame, safety guard and 5 foot cable are all included as standard.



www.strong-lighting.com

800-424-1215